



Black Gold[®]

Luxury radiant floor heat film
for low-profile flooring materials
installed in motorcoaches & RVs.



Simple and fast installation

No thinset, clips or wire stringing required!

Black Gold[®] floor heat film heats the room with infrared rays by passing electrical current through the carbon film.

Available in 120V and 240V.

Quick and easy installation.

Maintenance-free.

Heats the room with far infrared rays of light.

Completely zonable.

Completely sealed components.

Available in 10" and 20" widths.

Completely sealed PET film.

Low-profile, lightweight, waterproof, and durable.

Includes proprietary terminated ends to save you installation time.


Even heating with fewer cold spots.



MADE FOR USE UNDER



LVP



Sheet vinyl/
Linoleum



Laminate



Carpet





Black Gold electric radiant floor heat film is a thin, pre-terminated, pre-cut film that lays on top of the subfloor, under the flooring material.

Black Gold® floor heat film heats the room with infrared rays by passing electrical current through the carbon film.

Your Black Gold® kit includes:




Your pre-measured, pre-terminated Black Gold film strips.



Thermostat that includes a floor heat sensor.

Floating floor stack up

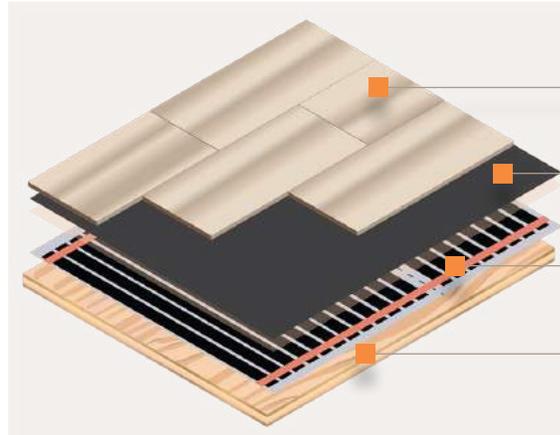

flooring material

friction barrier

Black Gold®

subfloor

Black Gold film adds just 1/16" to the total floor stack up.*

* Total stack-up varies with flooring material.

INSTALLATION

During a typical installation, pockets and grooves are routed into the subfloor to accept the cold lead wires.

The Black Gold film is adhered to the subfloor and the flooring material is installed on top.

Gold Heat design engineers are standing by to help you before, during, and after the installation.

SPECIFICATIONS

Standard 120 or 240 volt line power - 15 watts per square foot.

Available in 10" and 20" widths - may be configured up to 35' long.

Pre-terminated cold leads - 10', 15', 20' lengths.

Multiple film panels can be connected in parallel to the same thermostat.
1800 watts @ 120 volts; 3600 watts @ 240 volts

Larger installations can be accommodated.

TOOLS NEEDED

Router with 1/2" bit
Vacuum

MATERIALS NEEDED

Black Gold film panels
Black Gold install guide
Spray adhesive (3M® #90 or #94)
Friction barrier (6m poly)
Black Gold template (provided)
Blue painters tape
Sharpie®

Contact us about pricing information.
Additional product information at goldheat.com.



(360) 608.0916 . elwellcorp.com
680-C South 28th Street
Washougal, WA 98671

